



Marking Sashing and Attaching Borders

SASHING


1. Create your rows with short sashing strips between block.

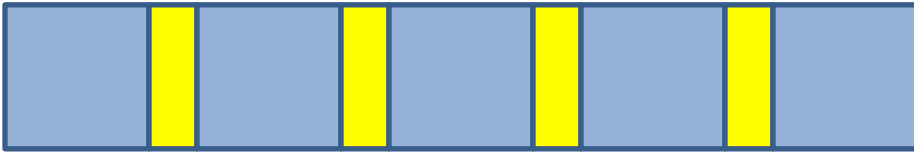




2. Attach a long sashing strip to the bottom of the first row

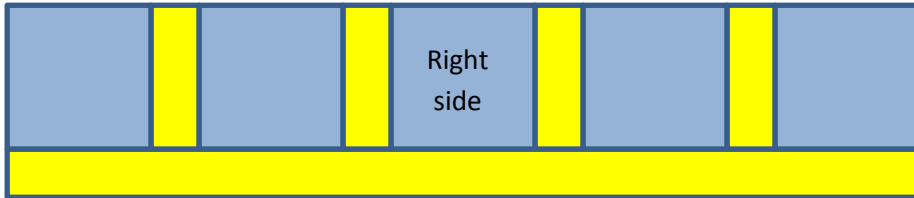

3. Before attaching a second row of blocks, turn the first row over and, using a ruler and a pencil, mark all of the seams as if they were continuing into the sashing (red lines).

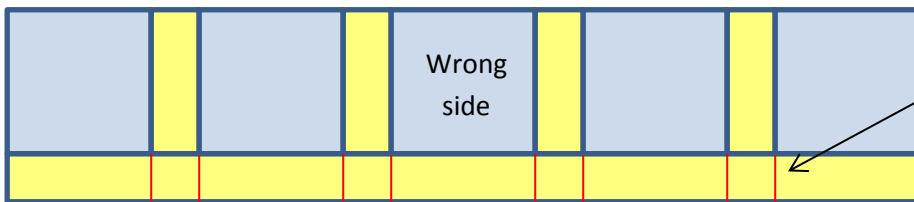

4. When you pin the next row of blocks to the horizontal sashing attached to Row 1, place them right sides together, match all of the seams in the second row with all the markings on the horizontal sashing strip. When you sew, ease as needed to keep those points matched. That way all of the blocks will be lined up and even when you are done.

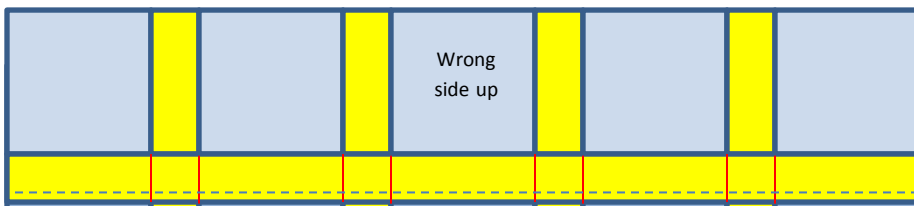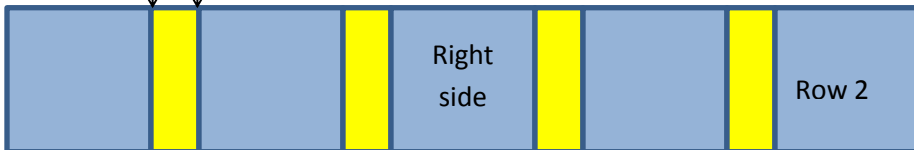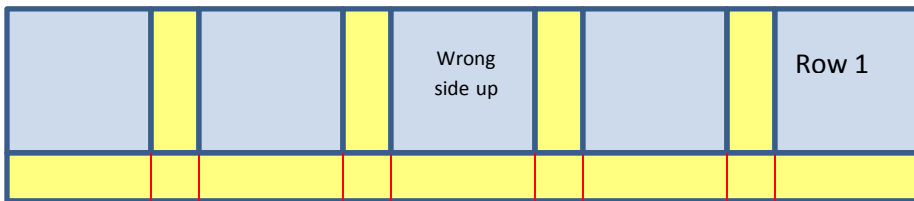

Row 2 is under Row #1, right sides together with sashing seams of Row #2 matching the marked red lines on the sashing strip.

Sew a 1/4" seam.